


Schrauben

Produktklasse A nach DIN ISO 4759 Teil 1

Senkkopfschrauben mit Innensechskant
Festigkeitsklasse 12.9

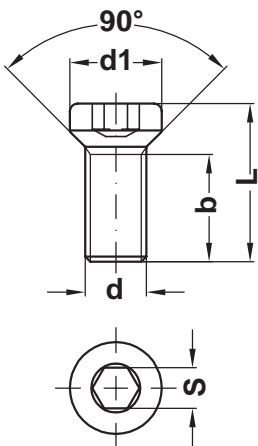

d	L	Best.-Nr.	b	d1	s
M10	29	390-10-029	19	18,0	8
	35	390-10-035	23		
	38	390-10-038	23		
	48	390-10-048	28		
M12	27	390-12-027	17	18,0	8
	31	390-12-031	21		
	35	390-12-035	25		
	40	390-12-040	30		
	50	390-12-050	30		
	58	390-12-058	35		
M14	35	390-14-035	24	22,5	10
	41	390-14-041	30		
	48	390-14-048	36		
	55	390-14-055	36		
	62	390-14-062	40		
	M16	35	390-16-035	24	22,5
40		390-16-040	28		
45		390-16-045	33		
48		390-16-048	33		
55		390-16-055	40		
58		390-16-058	40		
65		390-16-065	45		
70		390-16-070	45		
M18	45	390-18-045	32	29,0	12
	51	390-18-051	38		
	55	390-18-055	40		
	60	390-18-060	42		
	70	390-18-070	48		
M20	42	390-20-042	29	29,0	12
	51	390-20-051	37		
	55	390-20-055	40		
	60	390-20-060	42		
	68	390-20-068	50		
	75	390-20-075	50		
M22	55	390-22-055	40	35,0	12
	60	390-22-060	45		
	68	390-22-068	50		
	80	390-22-080	60		
M24	50	390-24-050	35	35,0	12
	60	390-24-060	45		
	74	390-24-074	52		
	86	390-24-086	60		
	100	390-24-100	70		
M27	60	390-27-060	45	41,0	12
	80	390-27-080	55		
M30	60	390-30-060	46	41,0	12
	75	390-30-075	60		
	86	390-30-086	65		
	100	390-30-100	80		
M36	66	390-36-066	52	47,0	12
	100	390-36-100	70		

Ausführung für BG8 (Katalog Seite 6–11)					
d	L	Best.-Nr.	b	d1	s
M06	19	390-06-019-8	10	15,5	6
	24	390-06-024-8	15		
	31	390-06-031-8	18		
M08	26	390-08-026-8	18	15,5	6
	30	390-08-030-8	20		
	35	390-08-035-8	25		
	40	390-08-040-8	30		
M10	27	390-10-027-8	19	15,5	6
	35	390-10-035-8	23		
	38	390-10-038-8	25		
M12	30	390-12-030-8	22	15,5	6
	36	390-12-036-8	26		
	40	390-12-040-8	30		
	45	390-12-045-8	35		
50	390-12-050-8	40			

Sonderausführung – Gewinde reduziert					
d	L	Best.-Nr.	b	d1	s
M08	25	390-12-025-08	15	18,0	8
	29	390-12-029-08	18		
	33	390-12-033-08			
	40	390-12-040-08	25		
M12	35	390-16-035-12	24	22,5	10
	40	390-16-040-12			
M16	42	390-20-042-16	29	29,0	12
	51	390-20-051-16	38		
	60	390-20-060-16	42		
M20	50	390-24-050-20	36	35,0	12
	60	390-24-060-20			
M24	60	390-30-060-24	45	41,0	12


Sonderausführung – Schlüsselweite					
d	L	Best.-Nr.	b	d1	s
M16	38	390-16-038-SW8	29	22,5	8
	45	390-16-045-SW8	33		
	58	390-16-058-SW8	40		



Schrauben

Produktklasse A nach DIN ISO 4759 Teil 1

Senkkopfschrauben mit Innensechskant in Zoll Festigkeitsklasse 12.9

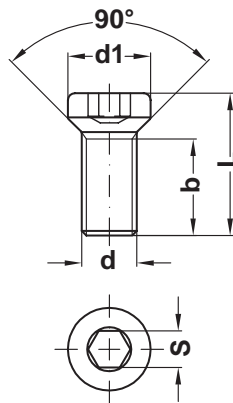

In Zoll						
d	L	Best.-Nr.		b	d1	s
1/2"	28	395-012-028		17	18,0	8
	38	395-012-038				
	38	395-012-050				
	35	395-16-035-012		24	22,5	10
5/8"	37	395-058-037		26	22,5	10
	42	395-058-042				
	50	395-058-050		39		
	60	395-058-060				
	75	395-058-075				
3/4"	45	395-034-045		32	29,0	12
	60	395-034-060				
	50	395-24-050-034			35,0	
1"	60	395-100-060		46	35,0	12
	75	395-100-075				