


Schrauben

Produktklasse A nach DIN ISO 4759 Teil 1

Stiftschrauben DIN 6379

Gewinde gerollt
Festigkeitsklasse 10.9

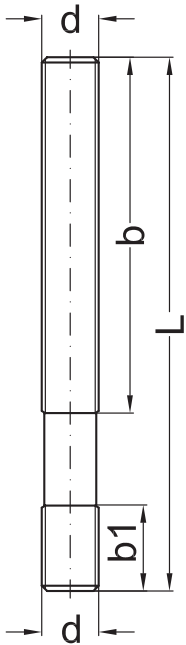

d	L	Best.-Nr.	b	b1
M06	32	379-06-032	16	9
	50	379-06-050	30	
	80	379-06-080	50	
M08	40	379-08-040	20	11
	63	379-08-063	40	
	100	379-08-100	63	
	160	379-08-160	100	
M10	50	379-10-050	25	13
	63	379-10-063	32	
	80	379-10-080	50	
	100	379-10-100	75	
	125	379-10-125	75	
	140	379-10-140	90	
	200	379-10-200	125	
M12	63	379-12-063	32	15
	80	379-12-080	50	
	100	379-12-100	63	
	125	379-12-125	75	
	150	379-12-150	90	
	200	379-12-200	125	
M14	63	379-14-063	32	17
	80	379-14-080	50	
	100	379-14-100	63	
	125	379-14-125	75	
	160	379-14-160	100	
	200	379-14-200	125	
	250	379-14-250	160	
	265	379-14-265	160	
	360	379-14-360	230	
	M16	80	379-16-080	
100		379-16-100	63	
125		379-16-125	75	
160		379-16-160	100	
200		379-16-200	125	
250		379-16-250	160	
280		379-16-280	160	
315		379-16-315	180	
370		379-16-370	250	
400		379-16-400	250	
M18	80	379-18-080	50	23
	125	379-18-125	75	
	140	379-18-140	80	
	170	379-18-170	100	
	200	379-18-200	125	
	212	379-18-212	125	
	280	379-18-280	160	
	315	379-18-315	180	

d	L	Best.-Nr.	b	b1
M20	80	379-20-080	32	27
	125	379-20-125	70	
	160	379-20-160	100	
	180	379-20-180	110	
	200	379-20-200	125	
	224	379-20-224	130	
	250	379-20-250	160	
	280	379-20-280	180	
	315	379-20-315	200	
	385	379-20-385	250	
	400	379-20-400	250	
	500	379-20-500	315	
M22	100	379-22-100	45	31
	160	379-22-160	100	
	224	379-22-224	130	
	250	379-22-250	160	
	315	379-22-315	180	
	400	379-22-400	250	
M24	100	379-24-100	45	35
	160	379-24-160	100	
	200	379-24-200	125	
	224	379-24-224	130	
	250	379-24-250	160	
	315	379-24-315	200	
	400	379-24-400	250	
	500	379-24-500	315	
	630	379-24-630	315	
	1000	379-24-1000	500	
M30	125	379-30-125	55	43
	200	379-30-200	125	
	315	379-30-315	200	
	500	379-30-500	315	
	700	379-30-700	400	
	1000	379-30-1000	400	
M36	160	379-36-160	100	51
	200	379-36-200	125	
	250	379-36-250	160	
	315	379-36-315	200	
	400	379-36-400	250	
	500	379-36-500	315	
	700	379-36-700	400	
	1000	379-36-1000	500	