


Schrauben

Produktklasse A nach DIN ISO 4759 Teil 1

Zylinderkopfschrauben DIN 912

Festigkeitsklasse 10.9
für Befestigungssatz SK / SKO

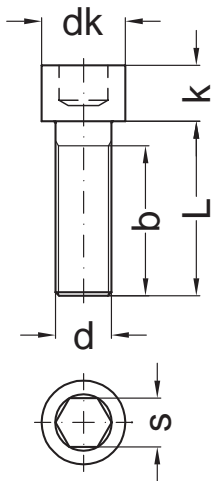

d	L	Best.-Nr.	b	k	dk	s
M04	16	908-04-016	14	4,0	7,0	3
M05	16	908-05-016	14	5,0	8,5	5
	18	908-05-018	16			
M06	12	908-06-012	10	6,0	10,0	5
	20	908-06-020	18			
	25	908-06-025	23			
M08	16	908-08-016	14	8,0	13,0	6
	25	908-08-025	23			
	35	908-08-035				
	40	908-08-040				

d	L	Best.-Nr.	b	k	dk	s
M10	25	908-10-025	23	10,0	16,0	8
	30	908-10-030				
	35	908-10-035				
	40	908-10-040				
	50	908-10-050				
M12	25	908-12-025	23	12,0	18,0	10
	30	908-12-030				
	35	908-12-035				
	40	908-12-040	36			
	45	908-12-045				
	50	908-12-050				
	55	908-12-055				
M14	35	908-14-035	32	14,0	21,0	12
	40	908-14-040				
	50	908-14-050	40			
	55	908-14-055				
	70	908-14-070				
M16	40	908-16-040	43	16,0	24,0	14
	45	908-16-045				
	50	908-16-050	44			
	55	908-16-055				
	60	908-16-060				
	65	908-16-065				
	70	908-16-070				
	80	908-16-080				
	90	908-16-090				
	95	908-16-095				
M18	40	908-18-040	38	18,0	27,0	14
	50	908-18-050	48			
	60	908-18-060				
	65	908-18-065				
	75	908-18-075				
	100	908-18-100				
M20	65	908-20-065	52	20,0	30,0	17
	70	908-20-070				
	75	908-20-075				
	80	908-20-080				
	85	908-20-085				
	90	908-20-090				
	100	908-20-100				
M22	85	908-22-085	52	22,0	33,0	17
	90	908-22-090				
	110	908-22-110				
M24	60	908-24-060	60	24,0	36,0	19
	90	908-24-090				
	95	908-24-095				
	100	908-24-100				
	110	908-24-110				
	120	908-24-120				

